

# ® SAFETOR ROOF ANCHORS

... when your life is on the line!!

## EWPA - Elevated Work Platform Anchor

This anchor complies to the AS/NZS 5532.2013 and the AS/NZS 1891.4.2009 Standards

### Anchor Type:

Elevated Platform Anchor (EPA)

### Application:

As per AS/NZS1891.4:2009 1 persons — Free fall arrest = 15kN

### Finish Coating:


Plascoat PPA 571 ES is resistant to stress cracking, adverse weather conditions, detergents, salt spray and typical airborne pollutants. The coating maintains excellent adhesion to the metal substrate without the need for a separate primer. The material also provides good abrasion and impact resistance

### EPDM Washers:

2 x EPDM washers 4.5mm x 100mm OD x 16mm ID are supplied with all EWPA - Elevated Work Platform Anchors. This protects the coating on the anchors and creates a barrier stopping any contact between the steel anchor and the aluminium cage floor thus eliminating any corrosion.

### Anchor Rating:

The rated ultimate capacity for this type of anchor as set out in table 3.1 of AS/NZS 1981.4:2009 is 15kN

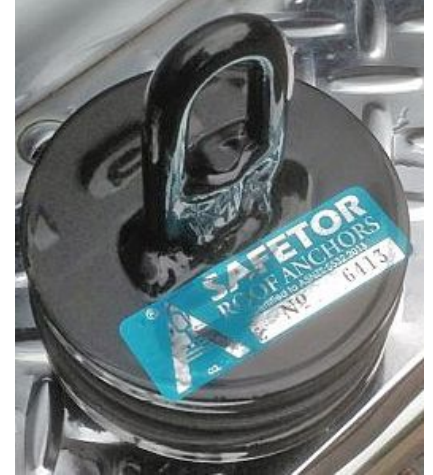

## Design

The Safetor EWPA - Elevated Work Platform anchor is designed to be fixed to the floor of any Safety Cage as shown in photo or to any flat sound structural platform or surface.

### NB:

1. You should always seek advice from a structural engineer before installing any height safety anchor points to any buildings or structures
2. All height safety anchors should be used as restraint anchors only
3. The anchors should be inspected annually and immediately prior to each use, by a competent person, as defined in AS/NZS 1191.4:2009.
4. No structural repairs or modification shall be carried out to the anchors without the express approval of Collins Corporation Ltd